

RoboRadar

Offering three installation options while maintaining an unparalleled tranquility, it boasts an upgraded functionality with three-axis control.

提供三種安裝方式，同樣擁有極致寧靜，功能進一步升級至三軸控制。



D69-2



C43



D69-1



reddot winner 2021
lighting design



C43

RoboRadar Series



- 黑色/Black
- 白色/White

線圖/Dimensions




調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-240V 50/60Hz
 功率:20W
 光通量:1690lm
 材質:鋁
 光束角:15°/24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:100-240V 50/60Hz
 Power:20W
 Luminous Flux:1690lm
 Material:Aluminum
 BA.:15°/24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

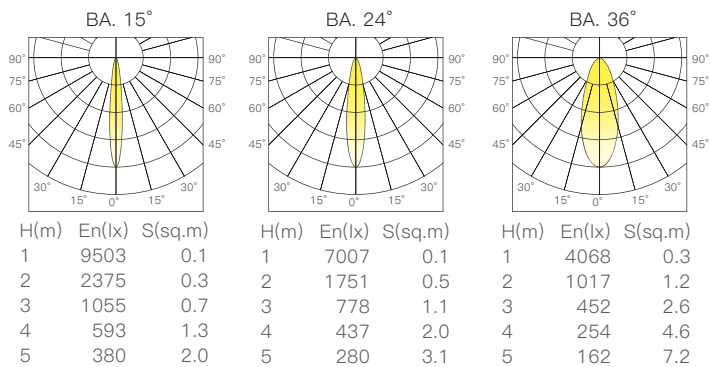



C43-1

RoboRadar Series



- 黑色/Black
- 白色/White

線圖/Dimensions



調光控制系統/Dimming Control




2.4GHz Wireless Connection

2.4GHz

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz
 功率:20W
 光通量:1690lm
 材質:鋁
 光束角:15°/24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:100-240V 50/60Hz
 Power:20W
 Luminous Flux:1690lm
 Material:Aluminum
 BA.:15°/24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

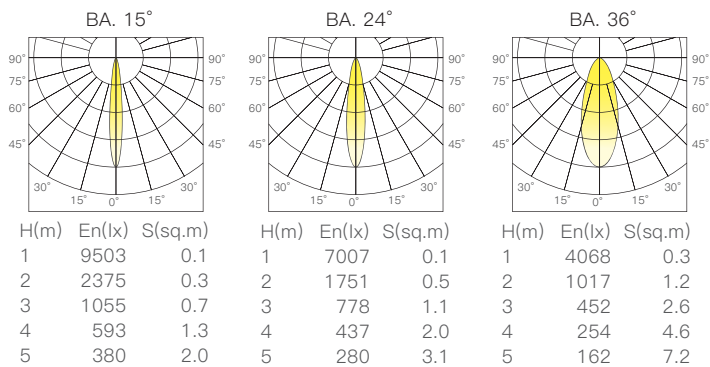



C43-2

RoboRadar Series



- 黑色/Black
- 白色/White

線圖/Dimensions



調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-240V 50/60Hz
 功率:20W
 光通量:1690lm
 材質:鋁
 光束角:15°/24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:100-240V 50/60Hz
 Power:20W
 Luminous Flux:1690lm
 Material:Aluminum
 BA.:15°/24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

