


# Aria

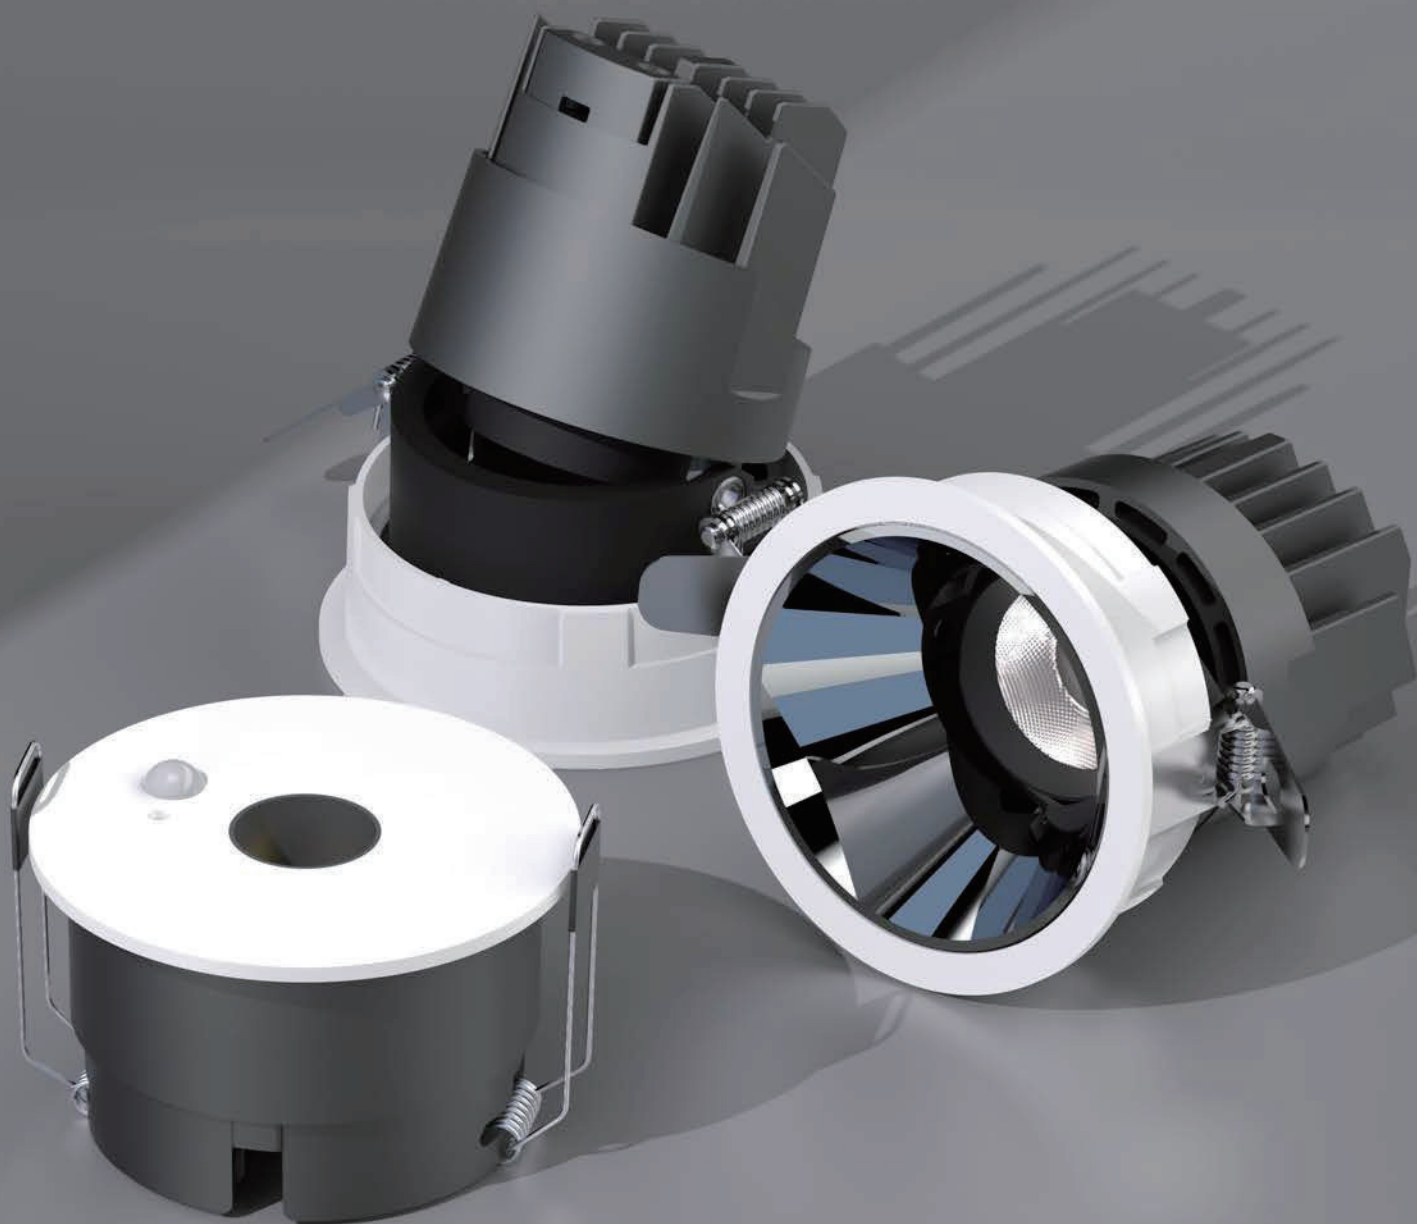

Representing exceptional beam clarity with a sharp cut-off line and no stray light, this series also features motion sensor functionality, meeting diverse needs for home lighting.

卓越光斑的代表，截止線清晰無雜光，同時支援感應功能，滿足居家多功能需求。


# D120-1

## Aria Series



● ○ 银灰+白/Silver Gray+White

### 線圖/Dimensions

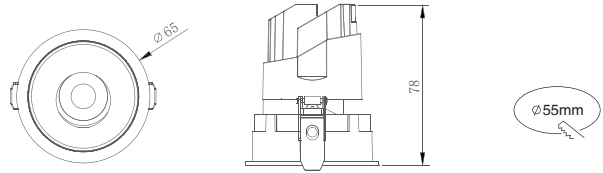

### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:7W

光通量:470lm

材質:鋁

光束角:20°/30°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:7W

Luminous Flux:470lm


Material:Aluminum

BA.:20°/30°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

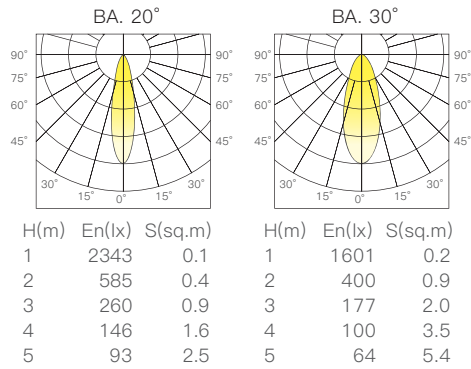


# D120-1-A

## Aria Series



● ○ 银灰+白/Silver Gray+White

### 線圖/Dimensions

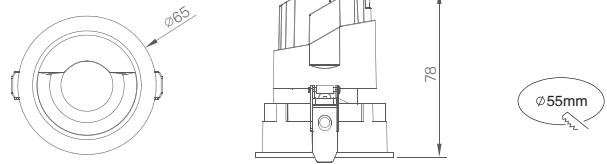

### 調光控制系統/Dimming Control



定電流  
non-dim



可控矽  
Triac



0-10V



DALI



Aco Smart

### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:7W

光通量:200lm

材質:鋁

光束角:偏光洗牆

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:7W

Luminous Flux:200lm


Material:Aluminum

BA.:Asymmetric wallwash

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	160	0.8
2	40	3.2
3	17	7.1
4	10	12.7
5	6	19.8




# D120-2

## Aria Series



● ○ 银灰+白/Silver Gray+White

### 線圖/Dimensions

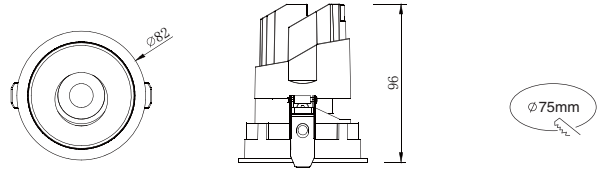

### 調光控制系統/Dimming Control



定電流  
non-dim



可控矽  
Triac



0-10V



DALI




Aco Smart

### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:10W  
 光通量:730lm  
 材質:鋁  
 光束角:20°/30°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:10W  
 Luminous Flux:730lm  
 Material:Aluminum  
 BA.:20°/30°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

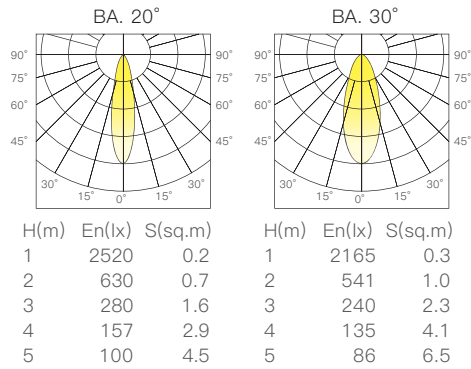


# D120-2-A

## Aria Series



● ○ 银灰+白/Silver Gray+White

### 線圖/Dimensions

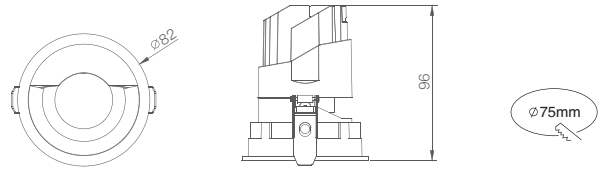

### 調光控制系統/Dimming Control



定電流  
non-dim



可控硅  
Triac



0-10V



DALI



Aco Smart

### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:10W

光通量:440lm

材質:鋁

光束角:偏光洗牆

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:10W

Luminous Flux:440lm


Material:Aluminum

BA.:Asymmetric wallwash

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	257	0.9
2	64	3.7
3	28	8.4
4	16	15.0
5	10	23.4




# D120-3

## Aria Series



● ○ 银灰+白/Silver Gray+White

### 線圖/Dimensions

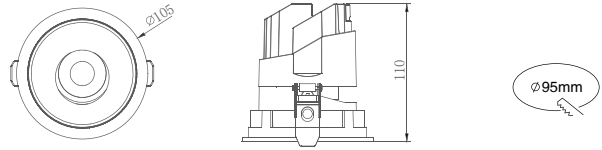


### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:20W  
 光通量:1350lm  
 材質:鋁  
 光束角:20°/30°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:20W  
 Luminous Flux:1350lm  
 Material:Aluminum  
 BA.:20°/30°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

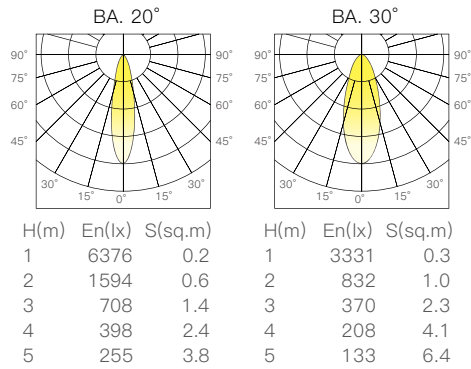


# D120-3-A

Aria Series



● ○ 银灰+白/Silver Gray+White

## 線圖/Dimensions

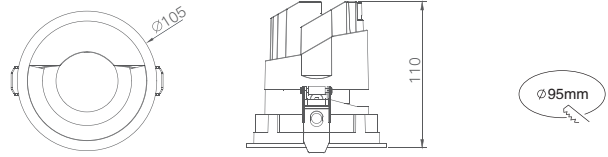

## 調光控制系統/Dimming Control



定電流  
non-dim



可控矽  
Triac



0-10V



DALI



Aco Smart

## 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:20W

光通量:1040lm

材質:鋁

光束角:偏光洗牆

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:20W

Luminous Flux:1040lm


Material:Aluminum

BA.:Asymmetric wallwash

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

## 配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1328	0.2
2	332	0.9
3	147	2.1
4	83	3.8
5	53	5.9




**D120-4**  
Aria Series



● 银灰+白/Gray+White

線圖/Dimensions

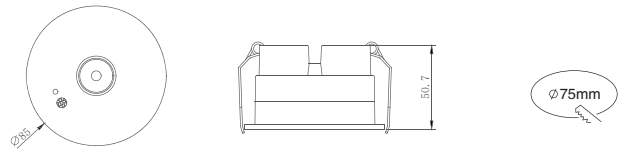


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz  
 功率:10W  
 光通量:600lm  
 材質:鋁  
 光束角:24°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K  
 Input Voltage:220-240V 50Hz  
 Power:10W  
 Luminous Flux:600lm  
 Material:Aluminum  
 BA.:24°  
 CRI:≥90  
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	2230	0.2
2	557	0.7
3	247	1.5
4	139	2.7
5	89	4.2

