

Clone Series

運用不同光引擎的組合，使整體燈具及應用更加廣泛，滿足使用者在不同環境的需求。

To extend the adaptability with light engines to achieve multiple function combination.




D11-1

Clone Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions



調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:9W

光通量:670lm

材質:鋁

光束角:24°/38°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:9W

Luminous Flux:670lm


Material:Aluminum

BA.:24°/38°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

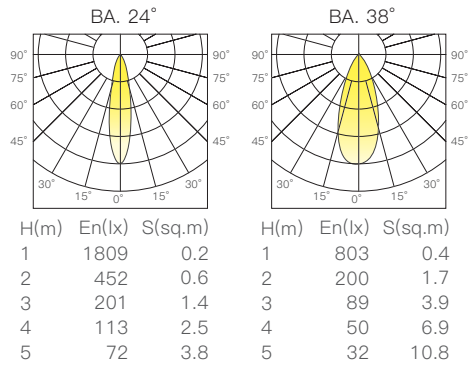


D11-2

Clone Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

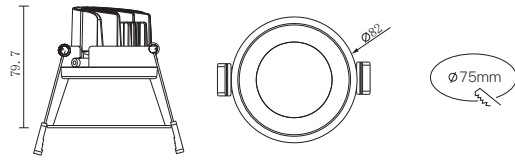


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-240V 50/60Hz
 功率:9W
 光通量:580lm
 材質:鋁
 光束角:24°/38°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:100-240V 50/60Hz
 Power:9W
 Luminous Flux:580lm
 Material:Aluminum
 BA.:24°/38°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

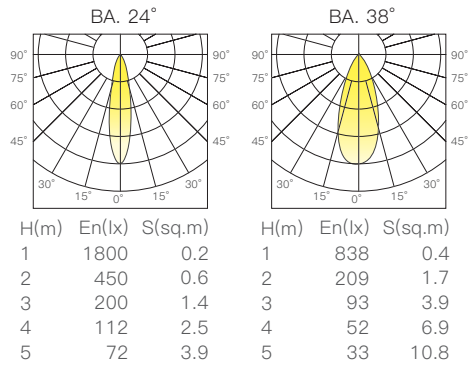


D11-3
Clone Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

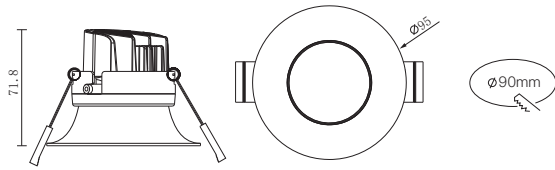


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-240V 50/60Hz
 功率:9W
 光通量:630lm
 材質:鋁
 光束角:24°/38°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:100-240V 50/60Hz
 Power:9W
 Luminous Flux:630lm
 Material:Aluminum
 BA.:24°/38°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

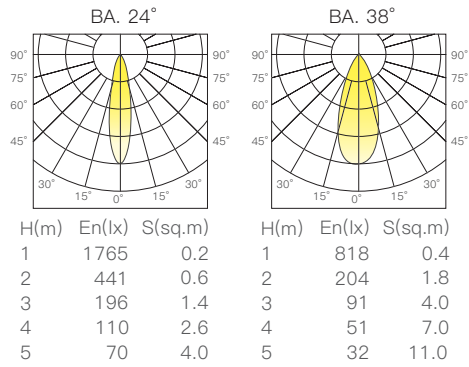


D11-4

Clone Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

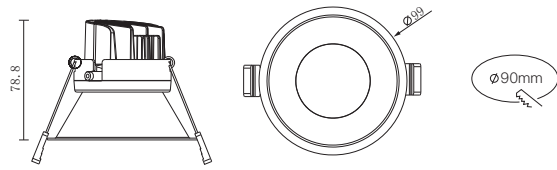

調光控制系統/Dimming Control



定電流
non-dim



可控矽
Triac



0-10V



DALI




Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz
 功率:9W
 光通量:610lm
 材質:鋁
 光束角:24°/38°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:100-240V 50/60Hz
 Power:9W
 Luminous Flux:610lm
 Material:Aluminum
 BA.:24°/38°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

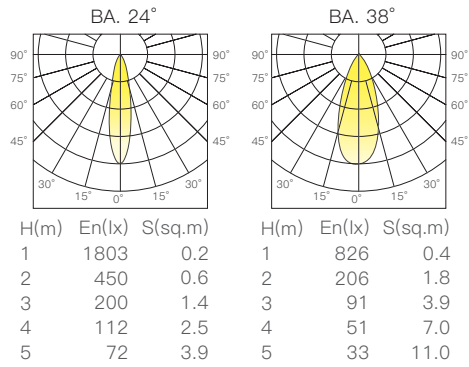


D11-4-B

Clone Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

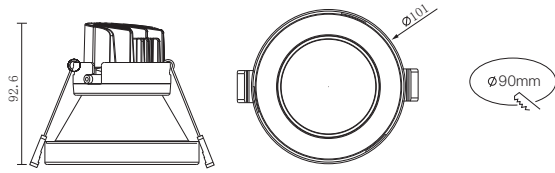


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-240V 50/60Hz
 功率:9W
 光通量:590lm
 材質:PC+鋁
 光束角:24°/38°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:100-240V 50/60Hz
 Power:9W
 Luminous Flux:590lm
 Material:PC+Aluminum
 BA.:24°/38°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

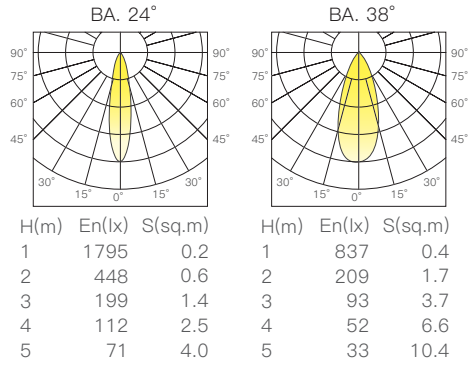


D11-4-C

Clone Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

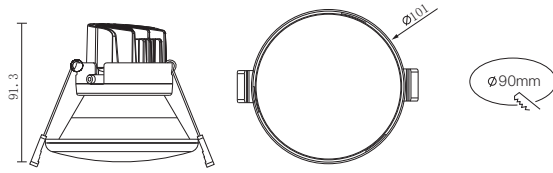


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-240V 50/60Hz
 功率:9W
 光通量:500lm
 材質:PC+鋁
 光束角:65°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:100-240V 50/60Hz
 Power:9W
 Luminous Flux:500lm
 Material:PC+Aluminum
 BA.:65°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	306	1.4
2	76	5.4
3	34	12.3
4	19	21.8
5	12	34.0




D11-5

Clone Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

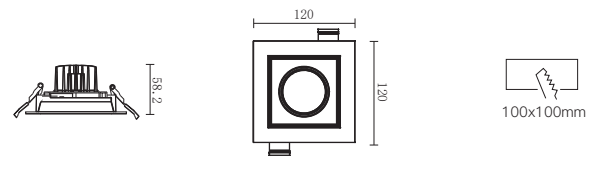


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-240V 50/60Hz
 功率:9W
 光通量:640lm
 材質:PC+鋁
 光束角:24°/38°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:100-240V 50/60Hz
 Power:9W
 Luminous Flux:640lm
 Material:PC+Aluminum
 BA.:24°/38°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

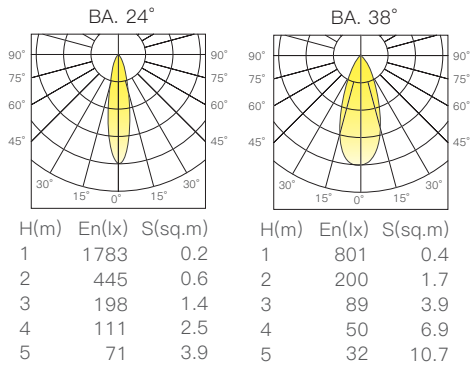


D11-6

Clone Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

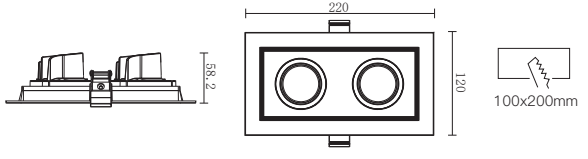


調光控制系統/Dimming Control

定電流 non-dim
 可控硅 Triac
 0-10V
 DALI
 Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz
 功率:9W*2
 光通量:640lm*2
 材質:PC+鋁
 光束角:24°/38°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:100-240V 50/60Hz
 Power:9W*2
 Luminous Flux:640lm*2
 Material:PC+Aluminum
 BA.:24°/38°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

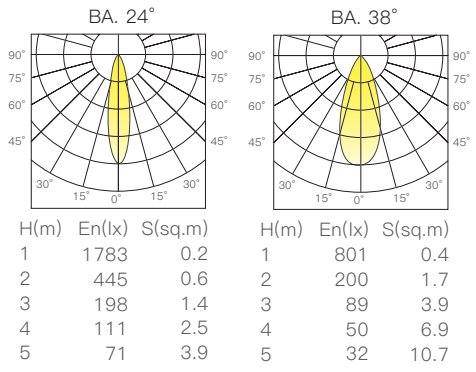


D11-7
Clone Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

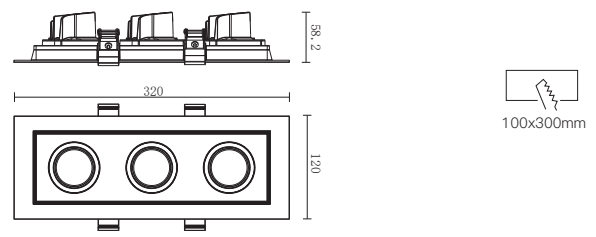

調光控制系統/Dimming Control

- 定電流 non-dim
- 可控硅 Triac
- 0-10V
- DALI
- Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz
 功率:9W*3
 光通量:640lm*3
 材質:PC+鋁
 光束角:24°/38°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:100-240V 50/60Hz
 Power:9W*3
 Luminous Flux:640lm*3
 Material:PC+Aluminum
 BA.:24°/38°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

