

D6-8-C



D6-6-C



D6-5-B



D6-4-B



Helium

Die-casting heatsink and glare-free design.  
良好的散熱系統及深防眩設計




**D6-3-B**  
Helium Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

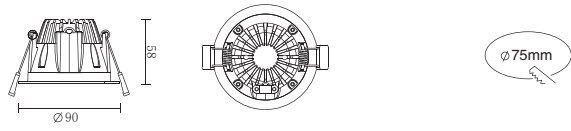


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:5W  
 光通量:250lm  
 材質:鋁  
 光束角:58°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K  
 Input Voltage:100-240V 50/60Hz  
 Power:5W  
 Luminous Flux:250lm  
 Material:Aluminum  
 BA.:58°  
 CRI:≥90  
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	273	0.9
2	68	3.7
3	30	8.3
4	17	14.8
5	10	23.1




**D6-3-B-D**  
Helium Series




- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

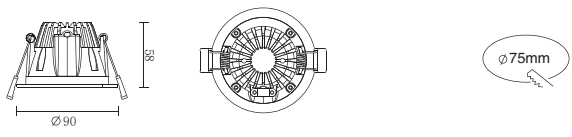


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:7W  
 光通量:390lm  
 材質:鋁  
 光束角:20°/36°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:7W  
 Luminous Flux:390lm  
 Material:Aluminum  
 BA.:20°/36°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

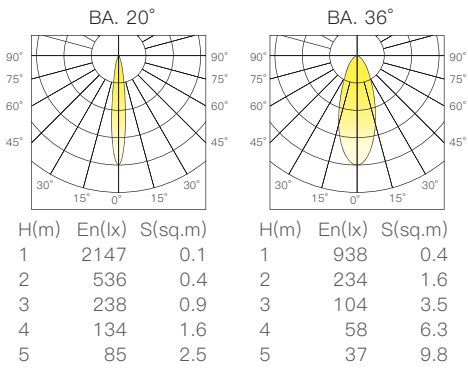


# D6-4-B

## Helium Series



- 黑色/Black
- 灰色/Grey
- 白色/White

### 線圖/Dimensions

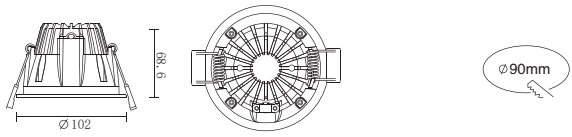


### 調光控制系統/Dimming Control

定電流 non-dim
 可控矽 Triac
 0-10V
 DALI
 Aco Smart

### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:8W  
 光通量:570lm  
 材質:鋁  
 光束角:65°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:8W  
 Luminous Flux:570lm  
 Material:Aluminum  
 BA.:65°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	419	1.2
2	104	4.7
3	46	10.6
4	26	18.9
5	16	29.6




# D6-4-B-D

## Helium Series



- 黑色/Black
- 灰色/Grey
- 白色/White

### 線圖/Dimensions

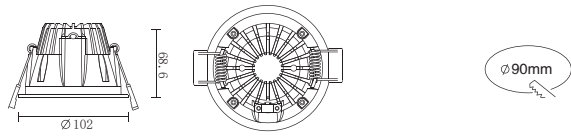


### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:11W  
 光通量:630lm  
 材質:鋁  
 光束角:15°/30°/40°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:11W  
 Luminous Flux:630lm  
 Material:Aluminum  
 BA.:15°/30°/40°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

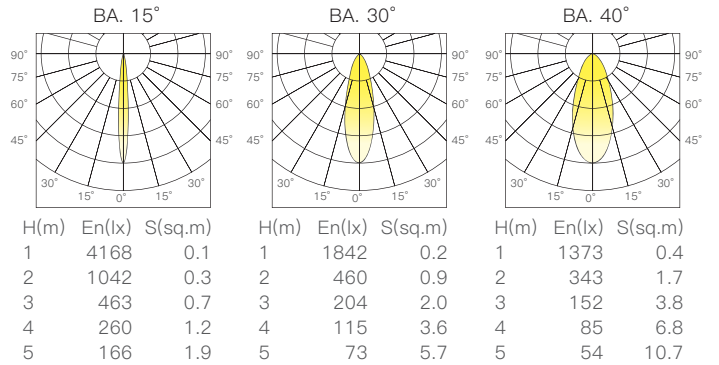


**D6-5-B**  
Helium Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

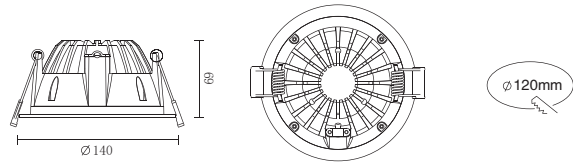


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:12W  
 光通量:950lm  
 材質:鋁  
 光束角:60°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:12W  
 Luminous Flux:950lm  
 Material:Aluminum  
 BA.:60°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	964	1.0
2	241	4.1
3	107	9.3
4	60	16.5
5	38	25.8




# D6-5-B-D

## Helium Series



- 黑色/Black
- 灰色/Grey
- 白色/White

### 線圖/Dimensions

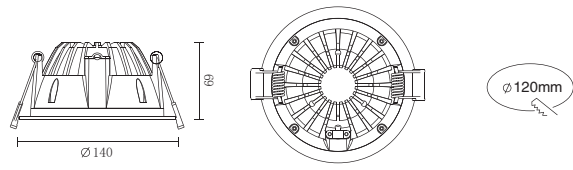


### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:15W  
 光通量:1300lm  
 材質:鋁  
 光束角:18°/30°/40°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:15W  
 Luminous Flux:1300lm  
 Material:Aluminum  
 BA.:18°/30°/40°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

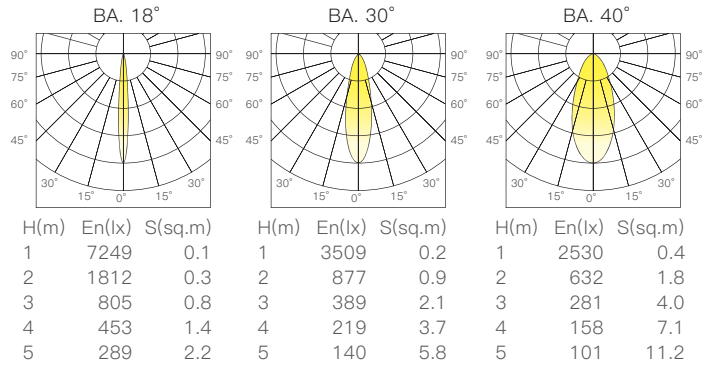




**D6-6-C**  
Helium Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

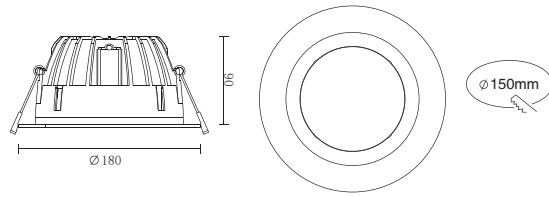

調光控制系統/Dimming Control



定電流  
non-dim



可控矽  
Triac



0-10V



DALI




Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:18W  
 光通量:1750lm  
 材質:PC+鋁  
 光束角:76°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:18W  
 Luminous Flux:1750lm  
 Material:PC+Aluminum  
 BA.:76°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1230	2.0
2	307	7.9
3	136	17.7
4	76	31.5
5	49	49.2




**D6-8-C**  
Helium Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

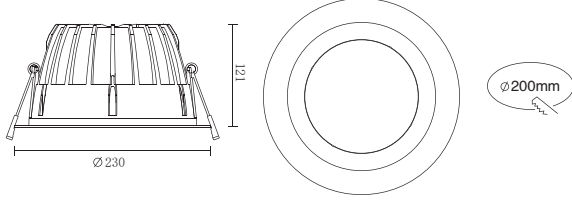


調光控制系統/Dimming Control

定電流 non-dim   
 可控硅 Triac   
 0-10V   
 DALI   
 Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:30W  
 光通量:2550lm  
 材質:PC+鋁  
 光束角:70°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:30W  
 Luminous Flux:2550lm  
 Material:PC+Aluminum  
 BA.:70°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1923	1.7
2	480	6.9
3	213	15.5
4	120	27.5
5	76	43

