

Equipped with a stepper motor, it operates in utmost silence without electrical noise, offering various control options. The luminaire style embodies an ultimate tech aesthetic.

搭載步進馬達，極致寧靜無電噪音，提供多種控制選擇，展現極致科技風格




RoboCan

**D63-1**  
Robocan Series



- 黑色/Black
- 白色/White

線圖/Dimensions

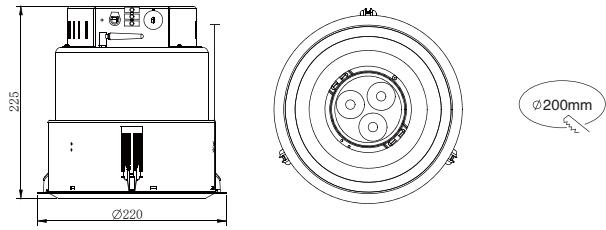


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:28W  
 光通量:1800lm  
 材質:鋁  
 光束角:7°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K  
 Input Voltage:100-240V 50/60Hz  
 Power:28W  
 Luminous Flux:1800lm  
 Material:Aluminum  
 BA.:7°  
 CRI:≥90  
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	45647	0.01
2	11411	0.05
3	5071	0.12
4	2852	0.21
5	1825	0.33




**D63-2**  
Robocan Series



- 黑色/Black
- 白色/White

線圖/Dimensions

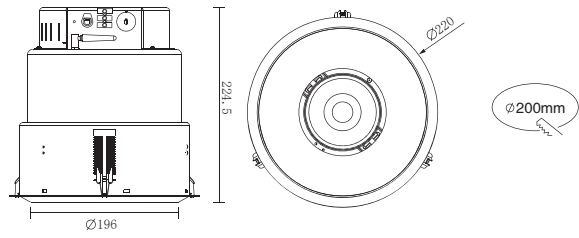


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:28W  
 光通量:1880lm  
 材質:鋁  
 光束角:24°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:28W  
 Luminous Flux:1880lm  
 Material:Aluminum  
 BA.:24°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	6668	0.2
2	1667	0.8
3	740	1.7
4	416	3.1
5	266	4.8




**D63-3**  
Robocan Series



- 黑色/Black
- 白色/White

線圖/Dimensions

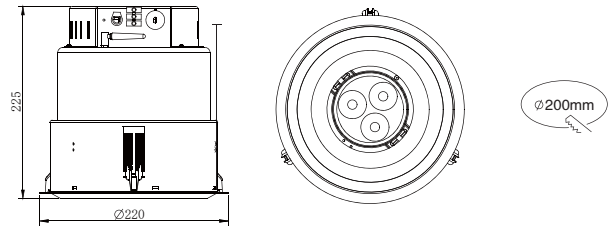

調光控制系統/Dimming Control




2.4GHz Wireless Connection

2.4GHz

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:28W  
 光通量:1800lm  
 材質:鋁  
 光束角:7°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K  
 Input Voltage:100-240V 50/60Hz  
 Power:28W  
 Luminous Flux:1800lm  
 Material:Aluminum  
 BA.:7°  
 CRI:≥90  
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	45647	0.01
2	11411	0.05
3	5071	0.12
4	2852	0.21
5	1825	0.33




**D63-4**  
Robocan Series



- 黑色/Black
- 白色/White

線圖/Dimensions

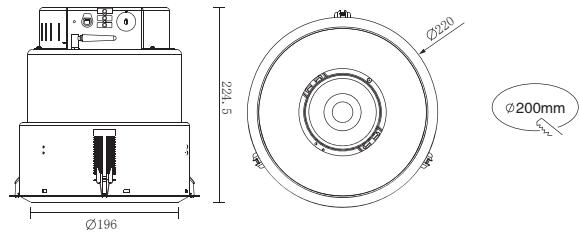

調光控制系統/Dimming Control



2.4GHz Wireless Connection

2.4GHz

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:28W

光通量:1880lm

材質:鋁

光束角:24°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:28W

Luminous Flux:1880lm


Material:Aluminum

BA.:24°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	6668	0.2
2	1667	0.8
3	740	1.7
4	416	3.1
5	266	4.8

