

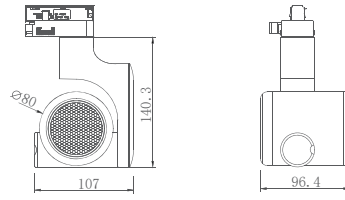

Bluetooth dimming system offers highly customizable scene control, enabling users to independently adjust lighting fixtures' color temperature, brightness, and on/off timing, providing exceptional user operability.

藍芽調光系統，提供高度個性化的場景控制，允許用戶輕鬆自行調整燈具的色溫、亮度以及啟動和關閉時間，實現卓越的操作自由度。

FlexRay

S71-1**FlexRay Series**

- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control****規格/Technical Specifications**

輸入電壓:100-265V 50/60Hz

功率:9W

光通量:550lm

材質:鋁

光束角:9°

濾片角度:15°/20°/30°/40°/50°/70°/20x60°/洗牆/蜂網片

顯示指數:≥90

色溫:2700K/3000K/4000K

Input Voltage:100-265V 50/60Hz

Power:9W

Luminous Flux:550lm

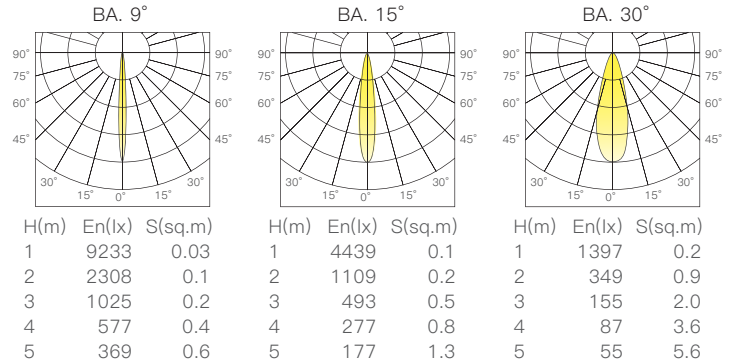
Material:Aluminum

BA.:9°

Filter Angle.:15°/20°/30°/40°/50°/70°/20x60°/wallwash/Honey Comb

CRI:≥90

CCT:2700K/3000K/4000K

配光曲線圖/Light pattern**光学配件/Front Ring Color**

2700K/3000K/3500K
色溫濾片
CCT filter



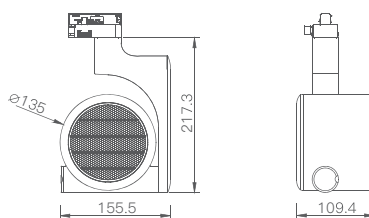
角度濾片
Magnetic filter

以上測量值以4000K為測試數據
Lumen measured of the data (4000K).



S71-2**FlexRay Series**

- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control****規格/Technical Specifications**

輸入電壓:100-265V 50/60Hz

功率:27W

光通量:2300lm

材質:鋁

光束角:9°

濾片角度:15°/20°/30°/40°/50°/70°/20x60°/洗牆/蜂巢片

顯示指數:≥90

色溫:2700K/3000K/4000K

Input Voltage:100-265V 50/60Hz

Power:27W

Luminous Flux:2300lm

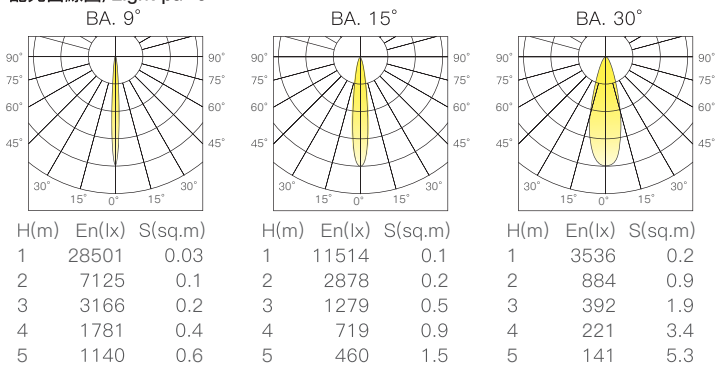
Material:Aluminum

BA.:9°

Filter Angle.:15°/20°/30°/40°/50°/70°/20x60°/wallwash/Honey Comb

CRI:≥90

CCT:2700K/3000K/4000K

配光曲線圖/Light pattern**光学配件/Front Ring Color**

2700K/3000K/3500K
色溫濾片
CCT filter



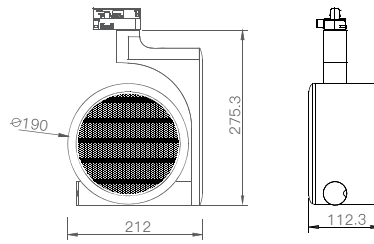

角度濾片
Magnetic filter

以上測量值以4000K為測試數據
Lumen measured of the data (4000K).



S71-3**FlexRay Series**

- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control****規格/Technical Specifications**

輸入電壓:100-265V 50/60Hz

功率:50W

光通量:4000lm

材質:鋁

光束角:9°

濾片角度:15°/20°/30°/40°/50°/70°/20x60°/洗牆/蜂網片

顯示指數:≥90

色溫:2700K/3000K/4000K

Input Voltage:100-265V 50/60Hz

Power:50W

Luminous Flux:4000lm

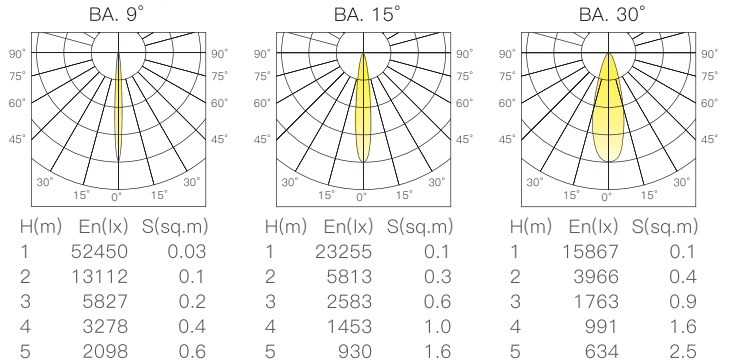

Material:Aluminum

BA.:9°

Filter Angle.:15°/20°/30°/40°/50°/70°/20x60°/wallwash/Honey Comb

CRI:≥90

CCT:2700K/3000K/4000K

配光曲線圖/Light pattern**光学配件/Front Ring Color**

以上測量值以4000K為測試數據
Lumen measured of the data (4000K).

