


## S61-3-L

### Mobi-Contour



- 黑色/Black
- 灰色/Grey
- 白色/White

#### 線圖/Dimensions

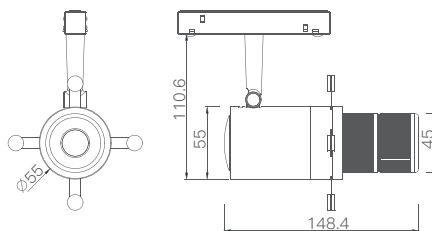


#### 調光控制系統/Dimming Control




#### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:12W  
 光通量:370lm  
 材質:鋁  
 光束角:27°-38°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:12W  
 Luminous Flux:370lm  
 Material:Aluminum  
 BA.:27°-38°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

#### 配光曲線圖/Light pattern

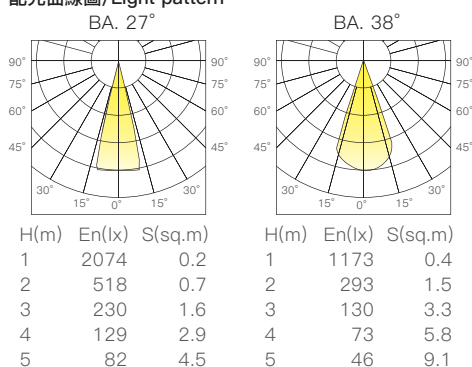

#### 光斑尺寸表/Spot Size Chart:

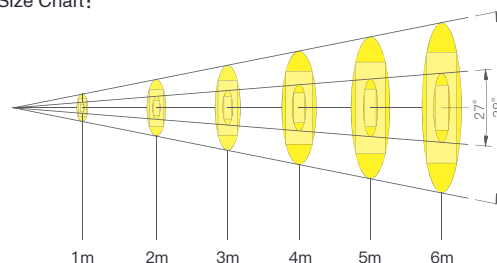

|                                             |      |      |      |      |      |      |
|---------------------------------------------|------|------|------|------|------|------|
| 27°Circular spot diameter<br>27°圓形光斑直徑(m):  | 1m   | 2m   | 3m   | 4m   | 5m   | 6m   |
|                                             | 0.48 | 0.96 | 1.44 | 1.92 | 2.4  | 2.88 |
| 27°Square spot side length<br>27°方形光斑邊長(m): | 0.34 | 0.68 | 1.02 | 1.36 | 1.70 | 2.04 |
| 27°Eav B<br>27°平均照度(lx):                    | 906  | 226  | 100  | 56   | 36   | 25   |
| 38°Circular spot diameter<br>38°圓形光斑直徑(m):  | 0.68 | 1.36 | 2.03 | 2.71 | 3.39 | 4.02 |
| 38°Square spot side length<br>38°方形光斑邊長(m): | 0.48 | 0.96 | 1.44 | 1.92 | 2.4  | 2.84 |
| 38°Eav B<br>38°平均照度(lx):                    | 486  | 121  | 54   | 30   | 19   | 13   |

#### 切光效果/Lighting effect

