



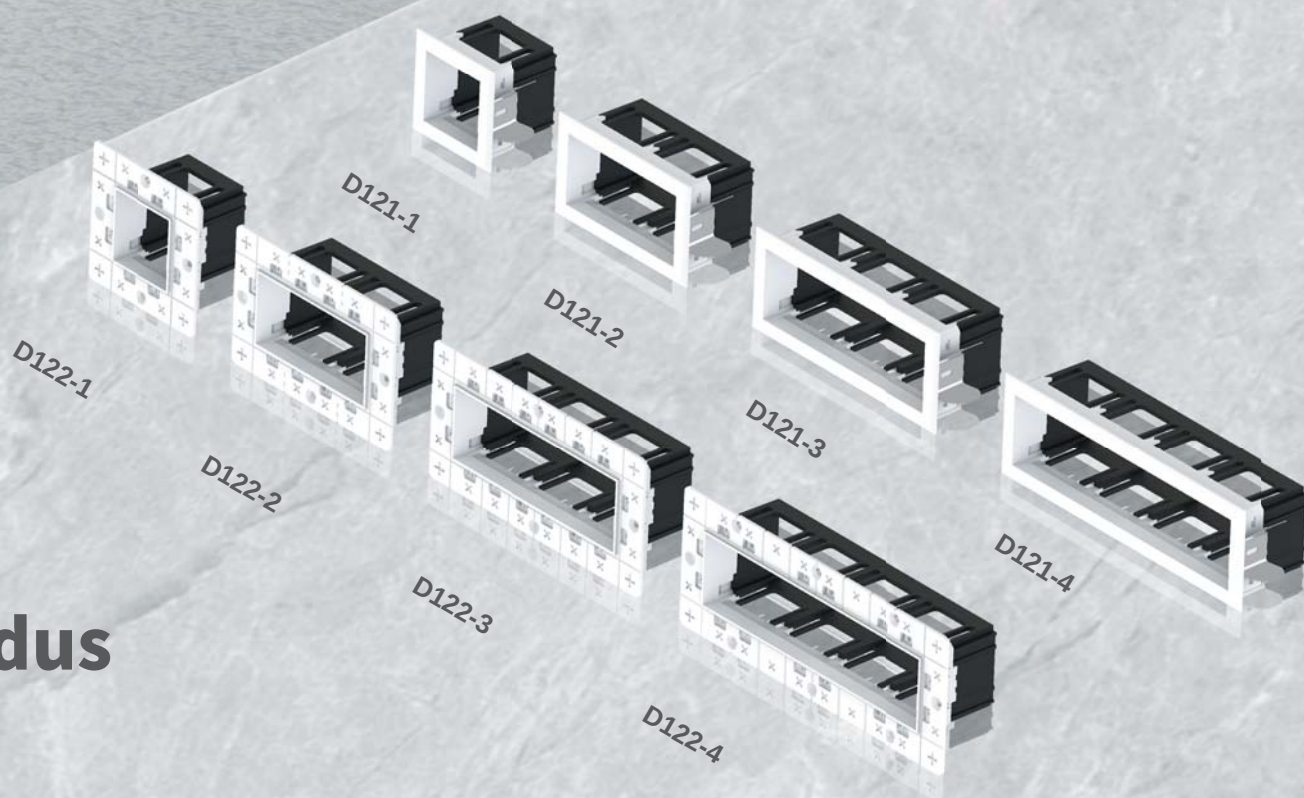

Modus

D121-2-J

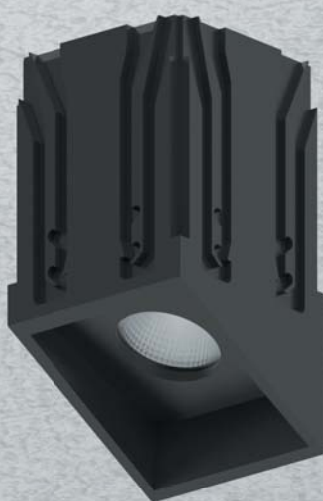

D121-1-G



D121-4-K



D121-1-I



D121-1-D



D121-1-H



D121-1-C



D121-1-F



D121-1-B



D121-1-E



D121-1-A




D121-1-A

Modus Series



- 黑色/Black
- 白色/White

線圖/Dimensions

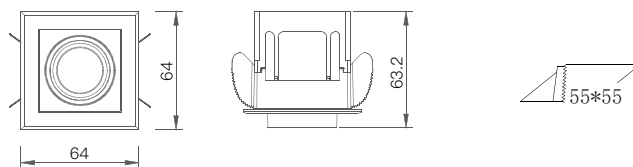

調光控制系統/Dimming Control



定電流
non-dim



可控矽
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:5W

光通量:320lm

材質:鋁

光束角:24°/36°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:5W

Luminous Flux:320lm


Material:Aluminum

BA.:24°/36°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1510	0.1
2	377	0.6
3	167	1.3
4	94	2.2
5	60	3.5


D121-1-B

Modus Series



- 黑色/Black
- 白色/White

線圖/Dimensions

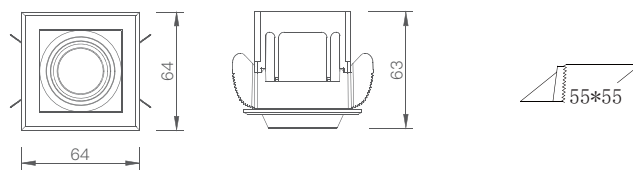

調光控制系統/Dimming Control



定電流
non-dim



可控矽
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:5W

光通量:340lm

材質:鋁

光束角:24°/36°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:5W

Luminous Flux:340lm


Material:Aluminum

BA.:24°/36°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1544	0.1
2	386	0.6
3	171	1.3
4	96	2.3
5	61	3.5


D121-1-C

Modus Series



- 黑色/Black
- 白色/White

線圖/Dimensions

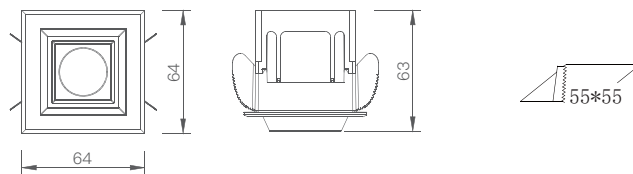

調光控制系統/Dimming Control



定電流
non-dim



可控矽
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:5W

光通量:330lm

材質:鋁

光束角:24°/36°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:5W

Luminous Flux:330lm


Material:Aluminum

BA.:24°/36°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1556	0.1
2	389	0.6
3	172	1.2
4	97	2.2
5	62	3.5


D121-1-D

Modus Series



- 黑色/Black
- 白色/White

線圖/Dimensions

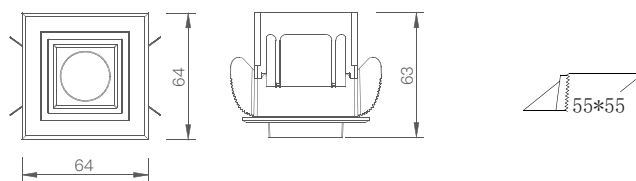

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:5W

光通量:340lm

材質:鋁

光束角:24°/36°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:5W

Luminous Flux:340lm


Material:Aluminum

BA.:24°/36°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1580	0.1
2	395	0.5
3	175	1.2
4	98	2.2
5	63	3.4


D121-1-E

Modus Series



- 黑色/Black
- 白色/White

線圖/Dimensions

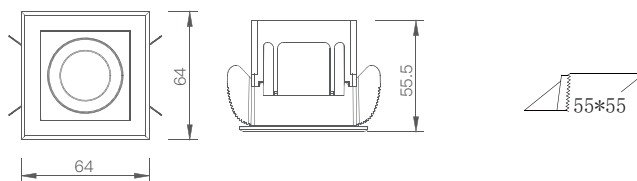

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:5W

光通量:340lm

材質:鋁

光束角:24°/36°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:5W

Luminous Flux:340lm


Material:Aluminum

BA.:24°/36°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1580	0.1
2	395	0.5
3	175	1.2
4	98	2.2
5	63	3.4




D121-1-F

Modus Series



- 黑色/Black
- 白色/White

線圖/Dimensions

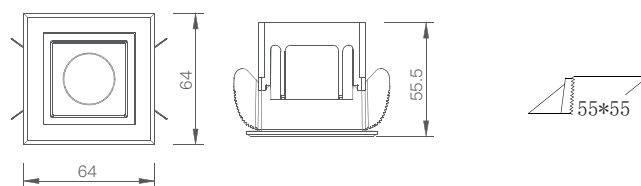

調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:5W

光通量:330lm

材質:鋁

光束角:24°/36°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:5W

Luminous Flux:330lm


Material:Aluminum

BA.:24°/36°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1572	0.1
2	393	0.5
3	174	1.2
4	98	2.1
5	62	3.4


D121-1-G

Modus Series



- 黑色/Black
- 白色/White

線圖/Dimensions

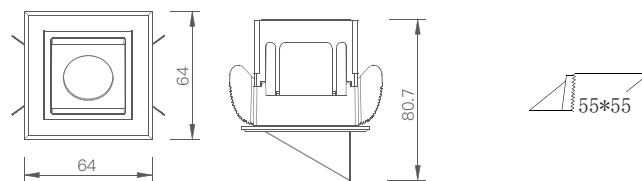

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:5W

光通量:270lm

材質:鋁

光束角:偏光洗牆

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:5W

Luminous Flux:270lm


Material:Aluminum

BA.:Asymmetric wallwash

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	171	0.7
2	42	2.8
3	19	6.3
4	10	11.2
5	6	17.5


D121-1-H

Modus Series



- 黑色/Black
- 白色/White

線圖/Dimensions

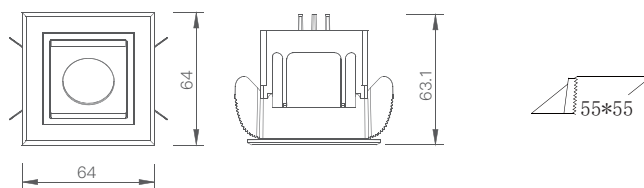

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:5W

光通量:380lm

材質:鋁

光束角:24°/36°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:5W

Luminous Flux:380lm


Material:Aluminum

BA.:24°/36°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1514	0.1
2	378	0.6
3	168	1.3
4	94	2.2
5	60	3.5


D121-1-I

Modus Series



- 黑色/Black
- 白色/White

線圖/Dimensions

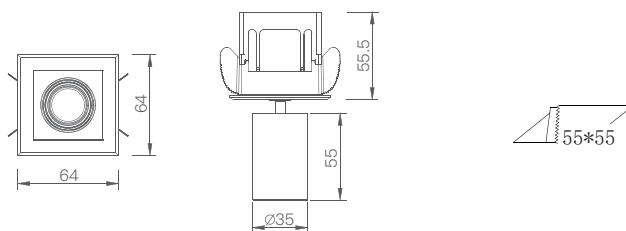

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:5W

光通量:370lm

材質:鋁

光束角:24°/36°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:5W

Luminous Flux:370lm


Material:Aluminum

BA.:24°/36°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1380	0.2
2	345	0.6
3	153	1.4
4	86	2.5
5	55	3.9


D121-2-J

Modus Series



○ ● 白+黑/White+Black

線圖/Dimensions

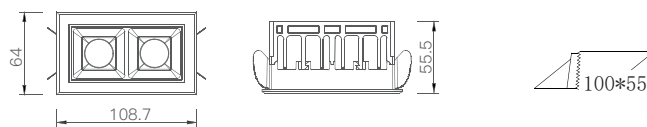

調光控制系統/Dimming Control



定電流
non-dim



可控矽
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:7W

光通量:620lm

材質:鋁

光束角:24°/36°

顯示指數:≥90

色溫:2700K/3000K/4000K

Input Voltage:100-240V 50/60Hz

Power:7W

Luminous Flux:620lm


Material:Aluminum

BA.:24°/36°

CRI:≥90

CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1937	0.2
2	484	0.8
3	215	1.9
4	121	3.4
5	77	5.3


D121-4-K

Modus Series



○ ● 白+黑/White+Black

線圖/Dimensions

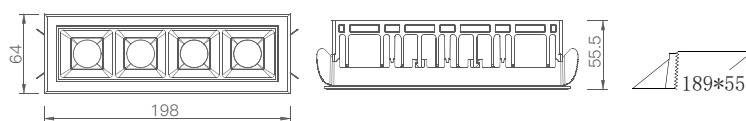

調光控制系統/Dimming Control



定電流
non-dim



可控矽
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:14W

光通量:1340lm

材質:鋁

光束角:24°/36°

顯示指數:≥90

色溫:2700K/3000K/4000K

Input Voltage:100-240V 50/60Hz

Power:14W

Luminous Flux:1340lm


Material:Aluminum

BA.:24°/36°

CRI:≥90

CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	4190	0.2
2	1047	0.8
3	465	1.8
4	261	3.2
5	167	5.1