

Highlighting an ultra-thin design, this series seamlessly blends advanced foundational lighting with supreme elegance, making it versatile for various settings.

主打極致輕薄，融合高級基礎照明功能，適用多場域，兼具極致優雅與實用。

D5-3-B-E

D5-5-B-E

D5-4-B-E

Plat


D5-3-B-E

Plat Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

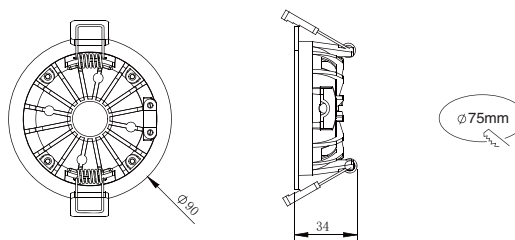

調光控制系統/Dimming Control



定電流
non-dim



可控矽
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:6W

光通量:330lm

材質:鋁

光束角:泛光

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:6W

Luminous Flux:330lm


Material:Aluminum

BA.:Flood

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	135.6	5.5
2	33.9	22.1
3	15.0	49.7
4	8.5	88.3
5	5.4	137.9


D5-4-B-E

Plat Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

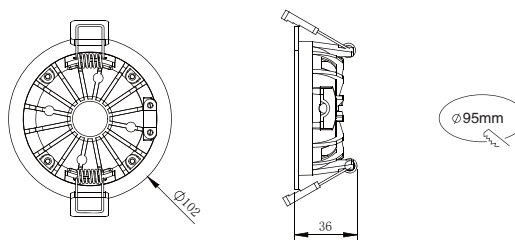

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:9W

光通量:580lm

材質:鋁

光束角:泛光

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:9W

Luminous Flux:580lm


Material:Aluminum

BA.:Flood

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	218.3	6.0
2	54.5	24.0
3	24.2	54.0
4	13.6	96.0
5	8.7	149.9


D5-5-B-E

Plat Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

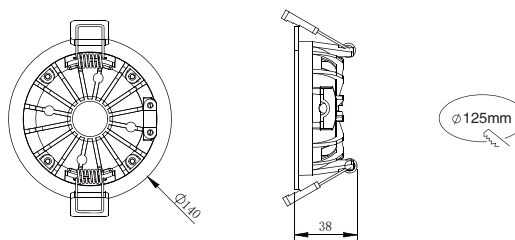

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:13W

光通量:1000lm

材質:鋁

光束角:泛光

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:13W

Luminous Flux:1000lm


Material:Aluminum

BA.:Flood

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	381	6.3
2	95	25.3
3	42	57.0
4	23	101.4
5	15	158.4