



Reynado

Light Engine 光引擎

The integrated module is adopted to meet the heat dissipation requirements and achieve the function of rapid assembly.


獨特的光引擎採用一體化模塊，達到散熱需求的同時做到快速拆卸功能



Rotating structure 調角中框集合

The lamp can achieve the maximum tilt and rotate angle, satisfied more applications.

燈具最大的調角旋轉角度設計，以應對更多的場合所需

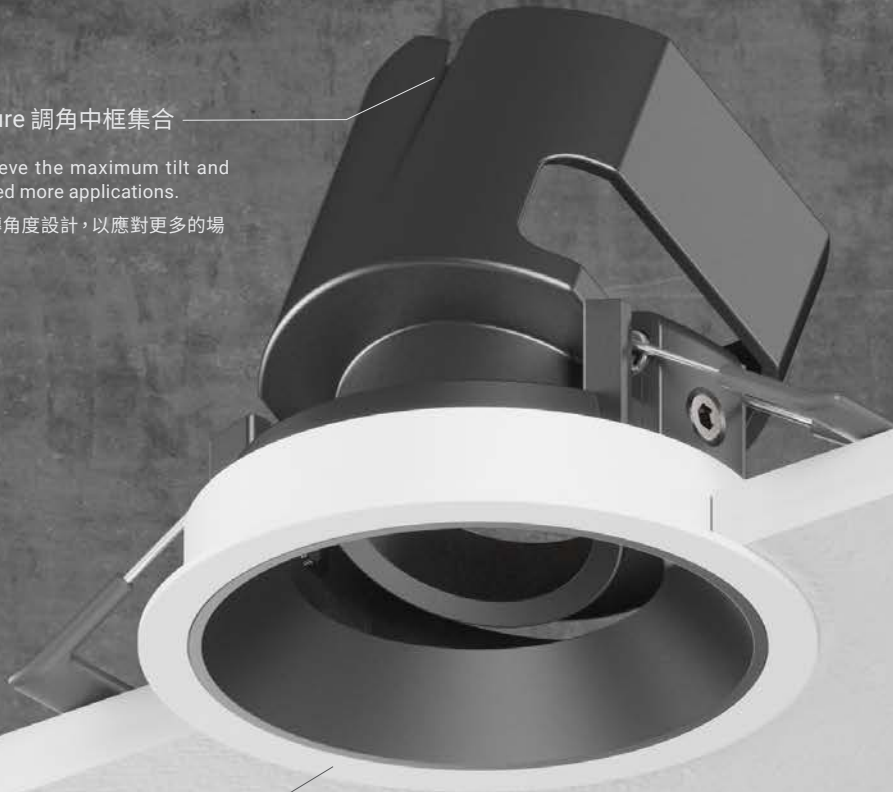

Front trim 前框

High-quality materials and painting, make the fixture more upscale.

使用高品質的材料與烤漆工藝，讓燈具更有質感




D112

Reynado Series



- 金/Gold
- 金+黑/Gold+Black
- 金+白/Gold+White
- 銀+黑/Silver+Black
- 銀+白/Silver+White
- 灰色+黑/Grey+Black
- 灰色+白/Grey+White

線圖/Dimensions

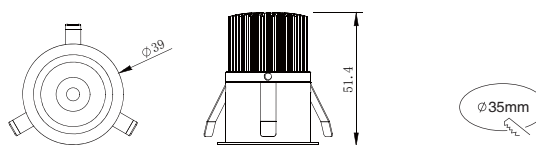

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:5W

光通量:290lm

材質:鋁

光束角:24°/36°

顯示指數:≥90

色溫:2700K/3000K/4000K

Input Voltage:100-240V 50/60Hz

Power:5W

Luminous Flux:290lm


Material:Aluminum

BA.:24°/36°

CRI:≥90

CCT:2700K/3000K/4000K

配光曲線圖/Light pattern

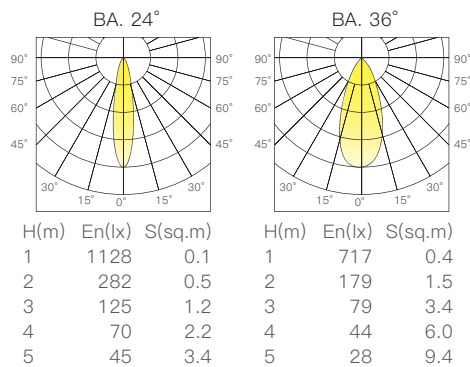


D112-1

Reynado Series



- 金/Gold
- 金+黑/Gold+Black
- 金+白/Gold+White
- 銀+黑/Silver+Black
- 銀+白/Silver+White
- 青灰+黑/Grey+Black
- 青灰+白/Grey+White

線圖/Dimensions

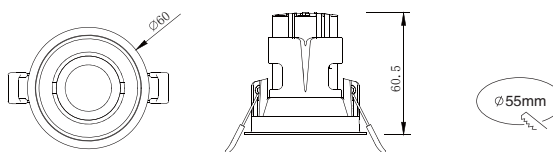

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:7W

光通量:470lm

材質:鋁

光束角:24°/36°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:7W

Luminous Flux:470lm


Material:Aluminum

BA.:24°/36°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

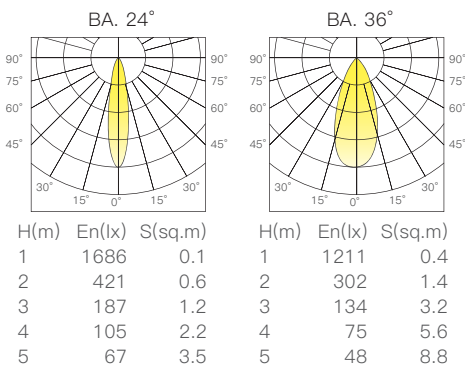

光學配件/Optical Accessories



