

# RoboRadar

Offering three installation options while maintaining an unparalleled tranquility, it boasts an upgraded functionality with three-axis control.

提供三種安裝方式，同樣擁有極致寧靜，功能進一步升級至三軸控制。



D69-2



C43



D69-1



reddot winner 2021  
lighting design


# D69

## RoboRadar Series



- 黑色/Black
- 白色/White

### 線圖/Dimensions

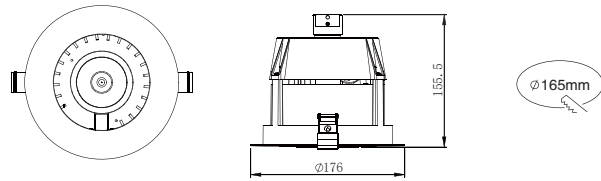


### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:20W  
 光通量:1690lm  
 材質:鋁  
 光束角:15°/24°/36°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:20W  
 Luminous Flux:1690lm  
 Material:Aluminum  
 BA.:15°/24°/36°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

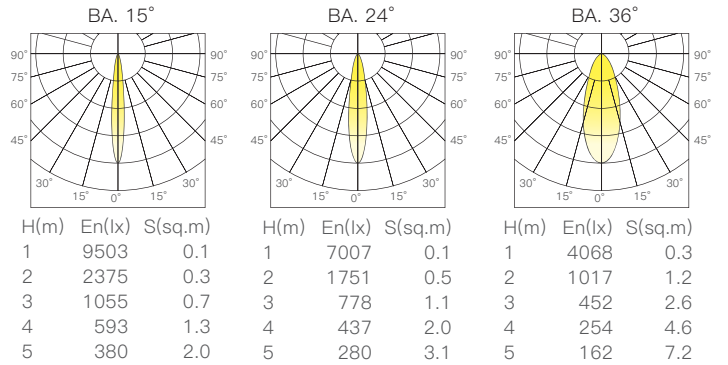


# D69-1

## RoboRadar Series



- 黑色/Black
- 白色/White

### 線圖/Dimensions

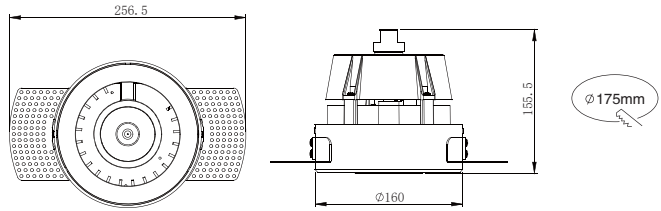


### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:20W  
 光通量:1690lm  
 材質:鋁  
 光束角:15°/24°/36°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:20W  
 Luminous Flux:1690lm  
 Material:Aluminum  
 BA.:15°/24°/36°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

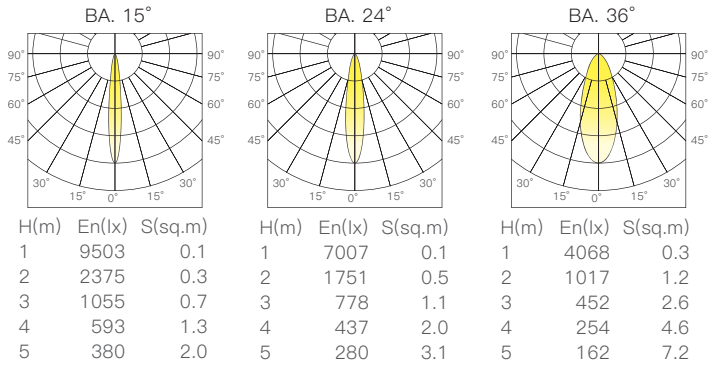


# D69-2

## RoboRadar Series




- 黑色/Black
- 白色/White

### 線圖/Dimensions

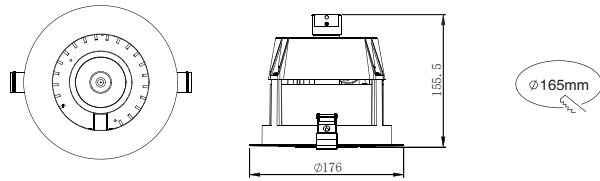


### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:20W  
 光通量:1690lm  
 材質:鋁  
 光束角:15°/24°/36°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:20W  
 Luminous Flux:1690lm  
 Material:Aluminum  
 BA.:15°/24°/36°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

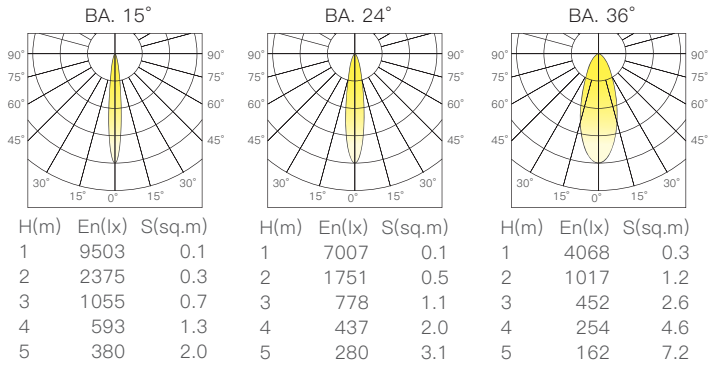


# D69-3

## RoboRadar Series



- 黑色/Black
- 白色/White

### 線圖/Dimensions

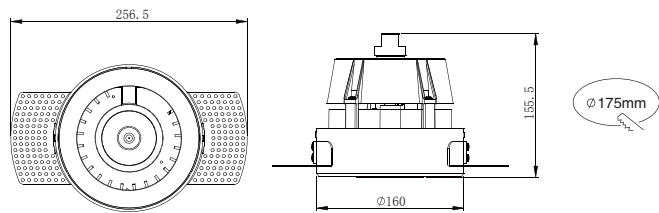


### 調光控制系統/Dimming Control

2.4GHz Wireless Connection  
2.4GHz

### 規格/Technical Specifications

輸入電壓:220-240V 50Hz  
 功率:20W  
 光通量:1600lm  
 材質:鋁  
 光束角:15°/24°/36°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:220-240V 50Hz  
 Power:20W  
 Luminous Flux:1600lm  
 Material:Aluminum  
 BA.:15°/24°/36°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

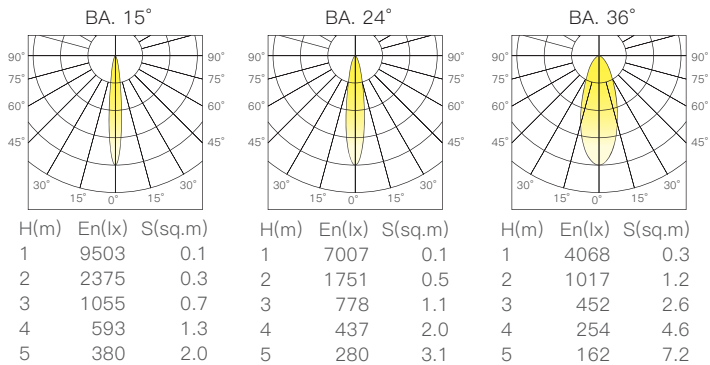


# D69-4

## RoboRadar Series



- 黑色/Black
- 白色/White

### 線圖/Dimensions

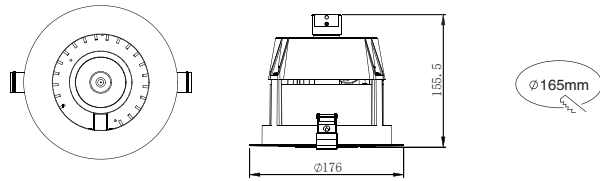


### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:20W  
 光通量:1690lm  
 材質:鋁  
 光束角:15°/24°/36°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:20W  
 Luminous Flux:1690lm  
 Material:Aluminum  
 BA.:15°/24°/36°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

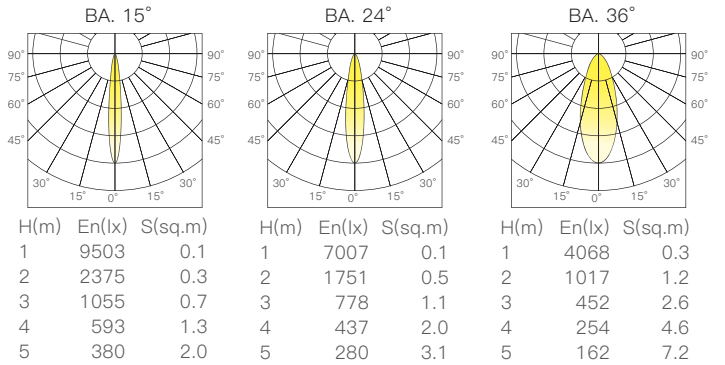


# D69-5

## RoboRadar Series



- 黑色/Black
- 白色/White

### 線圖/Dimensions

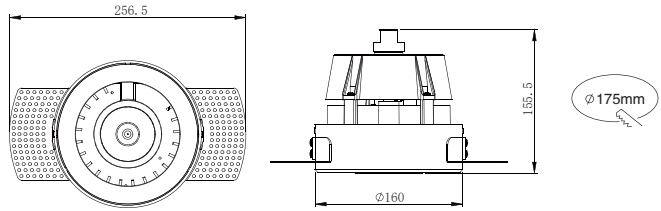

### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:100-240V 50/60Hz  
 功率:20W  
 光通量:1690lm  
 材質:鋁  
 光束角:15°/24°/36°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:100-240V 50/60Hz  
 Power:20W  
 Luminous Flux:1690lm  
 Material:Aluminum  
 BA.:15°/24°/36°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

