

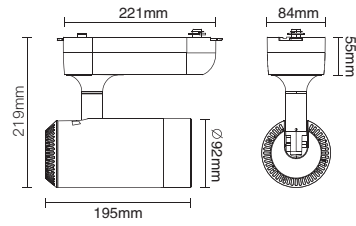
RoboTrac



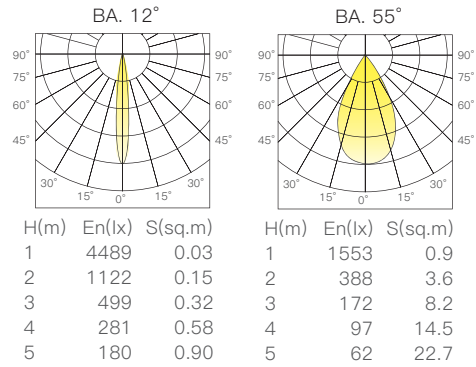
DESIGN PLUS
powered by: **light+building**

S21-1**RoboTrac Series**

- 黑色/Black
- 白色/White

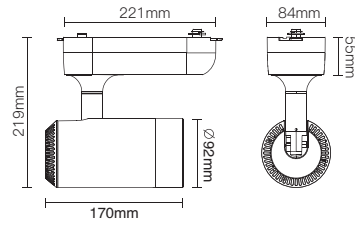
線圖/Dimensions**調光控制系統/Dimming Control****規格/Technical Specifications**

輸入電壓:100-240V 50/60Hz
 功率:28W
 光通量:1700lm (6000K)
 材質:鋁+PC
 光束角:12°-55°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:100-240V 50/60Hz
 Power:28W
 Luminous Flux:1700lm (6000K)
 Material:Aluminum+PC
 BA.:12°-55°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

S21-2**RoboTrac Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control****規格/Technical Specifications**

輸入電壓:100-240V 50/60Hz

功率:28W

光通量:2550lm

材質:鋁+PC

光束角:7°

顯示指數:≥90

色溫:2700K/3000K/4000K

Input Voltage:100-240V 50/60Hz

Power:28W


Luminous Flux:2550lm

Material:Aluminum+PC

BA.:7°

CRI:≥90

CCT:2700K/3000K/4000K

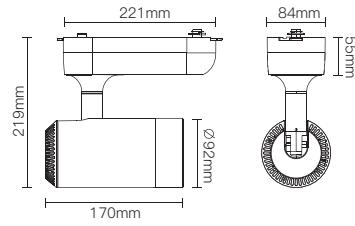
配光曲線圖/Light pattern

H(m)	En(lx)	S(sq.m)
1	59587	0.01
2	14896	0.05
3	6620	0.11
4	3724	0.20
5	2383	0.32

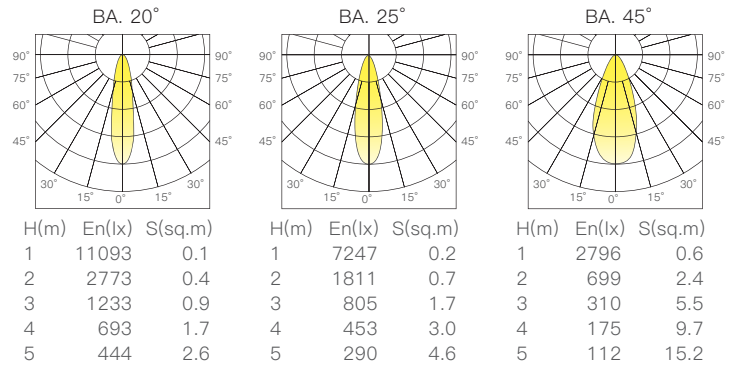


S21-2-A**RoboTrac Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control****規格/Technical Specifications**

輸入電壓:100-240V 50/60Hz
 功率:28W
 光通量:2200lm
 材質:鋁+PC
 光束角:20°/25°/45°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:100-240V 50/60Hz
 Power:28W
 Luminous Flux:2200lm
 Material:Aluminum+PC
 BA.:20°/25°/45°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

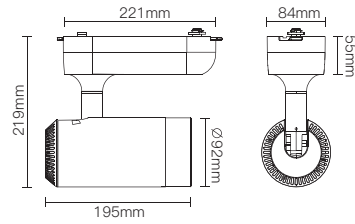
S21-3

RoboTrac Series



- 黑色/Black
- 白色/White

線圖/Dimensions



調光控制系統/Dimming Control

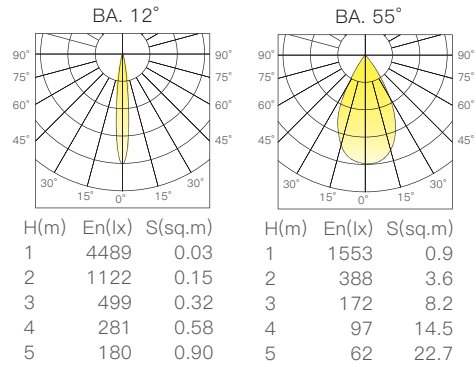


2.4GHz Wireless Connection
2.4GHz

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz
功率:28W
光通量: 1700lm (6000K)
材質:鋁+PC
光束角:12°-55°
顯示指數:≥90
色溫:2700K/3000K/4000K/雙色溫
Input Voltage:100-240V 50/60Hz
Power:28W
Luminous Flux:1700lm (6000K)
Material:Aluminum+PC
BA.:12°-55°
CRI:≥90
CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



配件/ Accessories

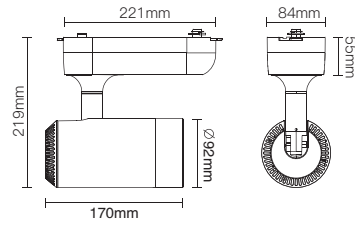


遙控器
Remote Control



S21-3-A**RoboTrac Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control**

2.4GHz Wireless Connection

2.4GHz

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:28W

光通量:2550lm

材質:鋁+PC

光束角:7°

顯示指數:≥90

色溫:2700K/3000K/4000K

Input Voltage:100-240V 50/60Hz

Power:28W


Luminous Flux:2550lm

Material:Aluminum+PC

BA.:7°

CRI:≥90

CCT:2700K/3000K/4000K

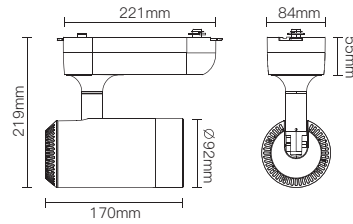
配光曲線圖/Light pattern

H(m)	En(lx)	S(sq.m)
1	59587	0.01
2	14896	0.05
3	6620	0.11
4	3724	0.20
5	2383	0.32

配件/ Accessories遙控器
Remote Control

S21-3-B**RoboTrac Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control**

2.4GHz Wireless Connection

2.4GHz

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:28W

光通量:2200lm

材質:鋁+PC

光束角:20°/25°/45°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:28W

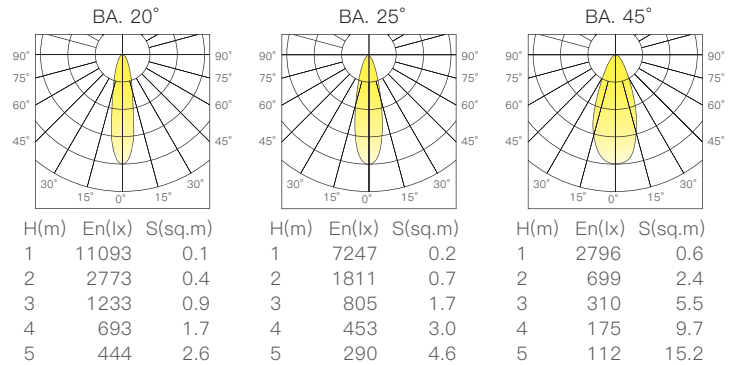
Luminous Flux:2200lm

Material:Aluminum+PC

BA.:20°/25°/45°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern**配件/ Accessories**遙控器
Remote Control