


D52-2



D52-1-A

D52-1-B

D52-1

Tango

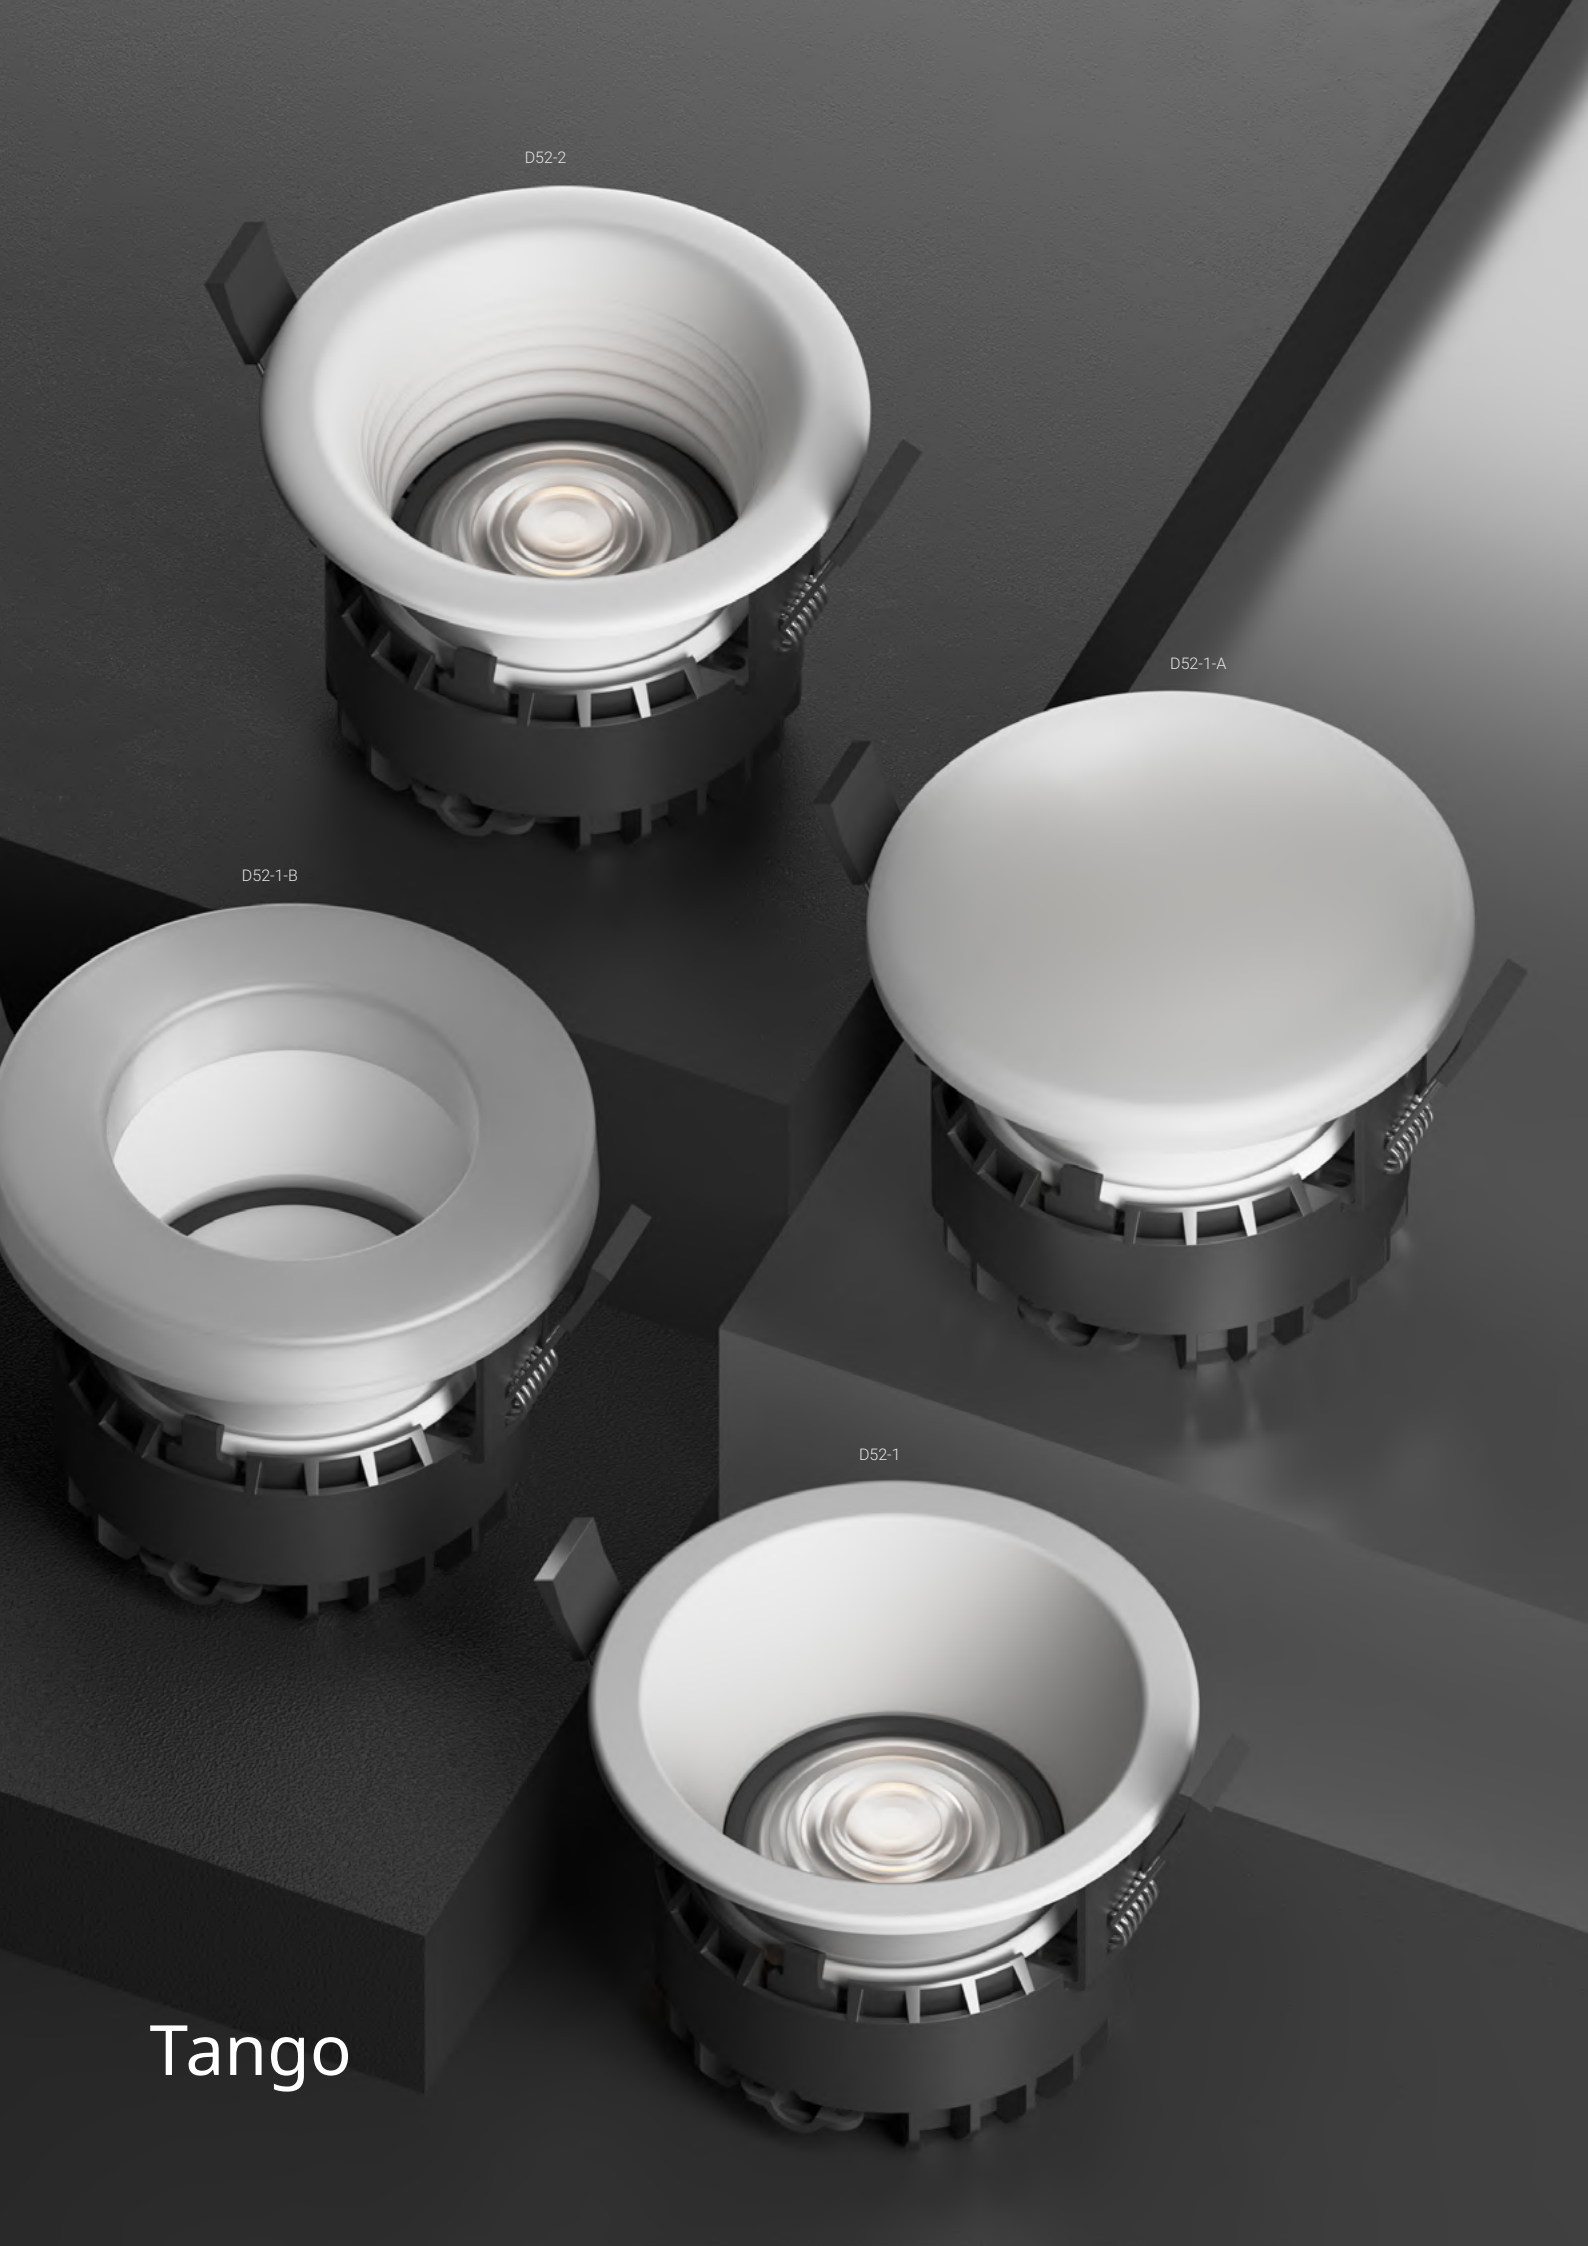

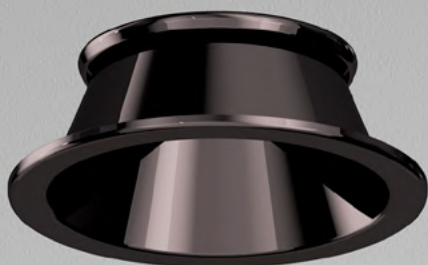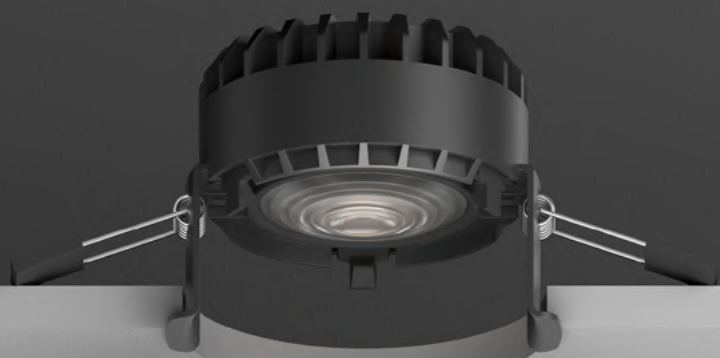

Modular design with different front trim options

模組化前框，依據功能需求輕鬆置換


D52-1

Tango Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

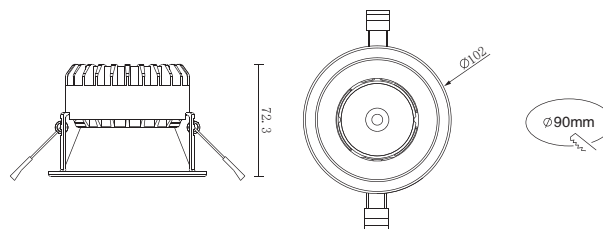

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:12W

光通量:650lm

材質:鋁

光束角:36°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:12W

Luminous Flux:650lm


Material:Aluminum

BA.:36°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1474	0.3
2	368	1.1
3	163	2.4
4	92	4.2
5	58	6.6

光學配件/Optical Accessories



白色
White



白鉻
White chromium



黑鉻
Black chromium


D52-1-A

Tango Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

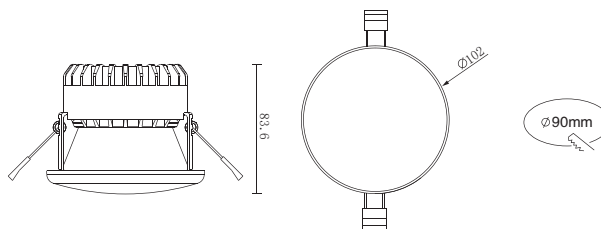

調光控制系統/Dimming Control



定電流
non-dim



可控矽
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:12W

光通量:570lm

材質:鋁

光束角:65°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:12W

Luminous Flux:570lm


Material:Aluminum

BA.:65°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	349	1.4
2	87	5.6
3	38	12.6
4	21	22.4
5	14	35.0


D52-1-B

Tango Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

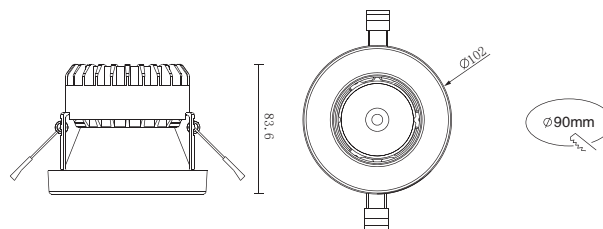

調光控制系統/Dimming Control



定電流
non-dim



可控矽
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:12W

光通量:610lm

材質:鋁

光束角:36°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:12W

Luminous Flux:610lm


Material:Aluminum

BA.:36°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1271	0.3
2	317	1.3
3	141	2.9
4	79	5.1
5	50	7.9


D52-2

Tango Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

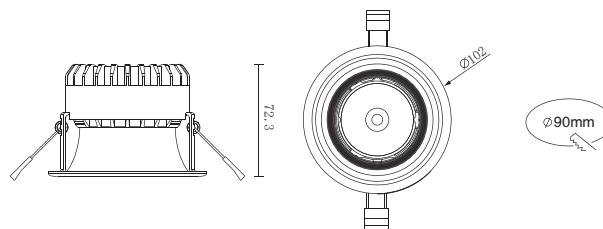

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V



DALI



Aco Smart

規格/Technical Specifications

輸入電壓:100-240V 50/60Hz

功率:12W

光通量:640lm

材質:鋁

光束角:36°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-240V 50/60Hz

Power:12W

Luminous Flux:640lm


Material:Aluminum

BA.:36°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1350	0.3
2	337	1.1
3	150	2.6
4	84	4.6
5	54	7.1

光學配件/Optical Accessories



白色
White



白鉻
White chromium



黑鉻
Black chromium